


POLICE

www.policelifestyle.com

BJK625
INSTRUCTION MANUAL

A. FEATURES

A
Key
Light

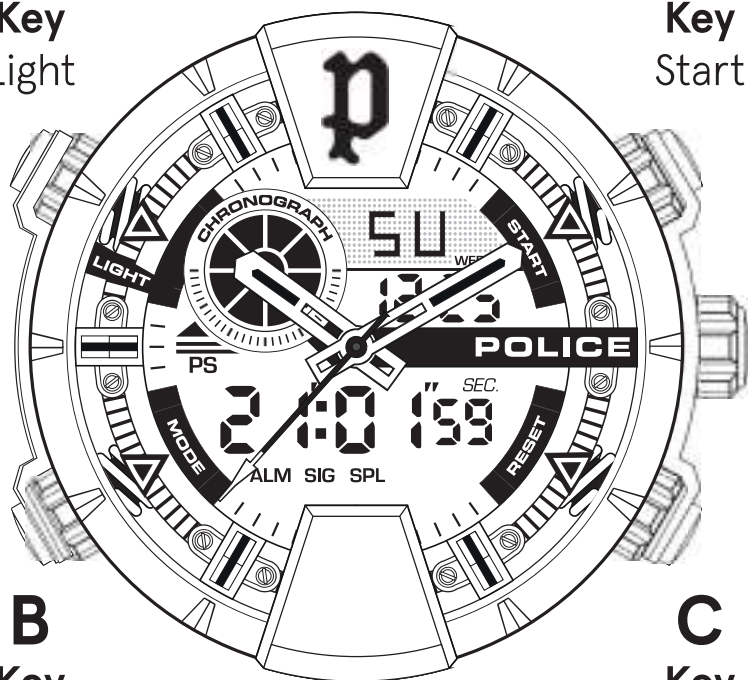


B
Key
Mode

D
Key
Start

C
Key
Reset

- ◆ 12 Digits LCD Display, Display Hour, Minute, Second, Month, Day and Week
- ◆ Daily Alarm and Chime hourly
- ◆ Snooze
- ◆ 12/24H format selectable
- ◆ 1/100 second Chronograph with split functions
- ◆ EL backlight

B. OPERATIONAL MANUAL

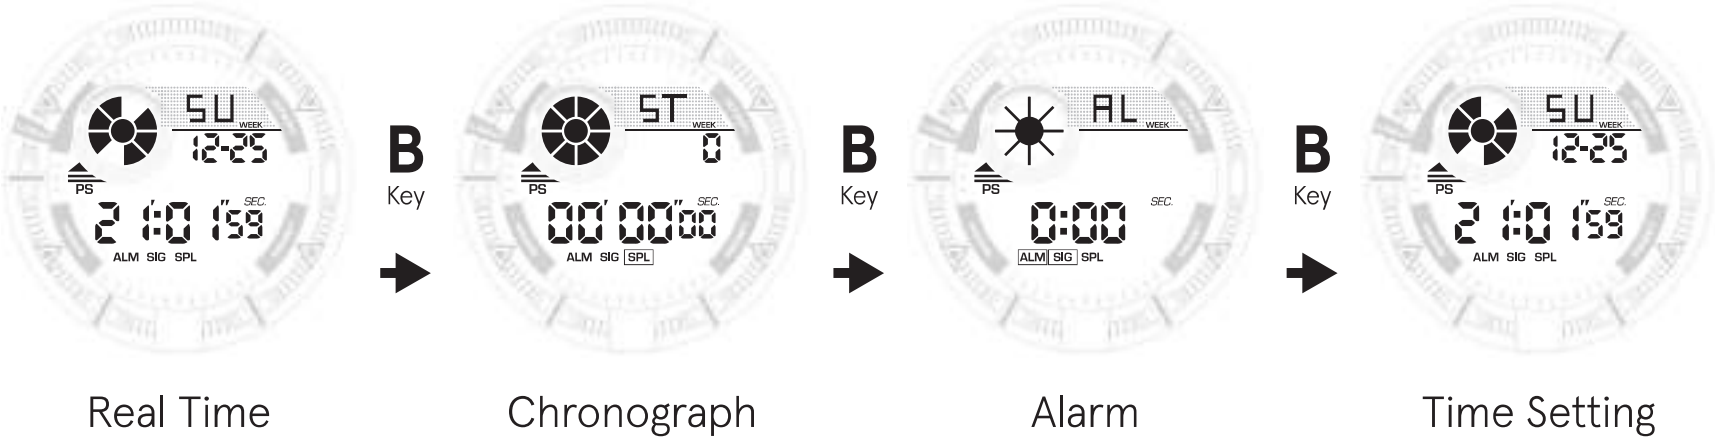

1. AT ANY STATE, PRESS A KEY EL BACKLIGHT FOR 3 SECONDS

2. CHRONOGRAPH

- ◆ Press C key to Start/Stop running;
- ◆ When stop, press C key to zero.
- ◆ When running, press C key to split count. Indicator SP showing.
- ◆ Then press D key to exit split count, and stop counting; press C key again to zero.
- ◆ When running, press B key to return to Real Time Mode, and it running at back.

3. DAILY ALARM

- ◆ Turn On / Off Alarm and Chime:
Press D key to turn on/off Alarm (ALM) or Chime (SIG)
- ◆ Alarm setting: Press C key to select "Hour" or "Minute" setting, Press D key to adjust the flashing item, Press C key to confirm, Press B key to return to Real Time mode.
- ◆ Alarm Snooze ON/OFF
At Alarm sounding state, press C key or D key to stop sounding, and press B key to ON/OFF snooze function .When Snooze function be ON, it will sound five minutes later, and auto stop after sounding for 20 Second.

4. TIME SETTING

- ◆ "Second" flashing when loading, press D key to zero; Press C key to select item as following sequence:

Hour ➔ Minute ➔ Month ➔ Day ➔ Day of Week ➔ Second

- ◆ When setting "Hour", "H" display for 24H format; "A" or "P" for 12H format.
- ◆ Press D key while the seconds are in the range of 30 to 59 resets them to 00 and adds 1 to the minutes. In the range of 00 to 29, the minutes are unchanged.

C. SPECIFICATIONS

Under the following conditions:

4 backlight operation (3 seconds) per day; 60 seconds of alarm operation per day.